



B2


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|--|-----------|---|
| (51) International Patent Classification 7 : H04M 3/56, 7/00 | A1 | (11) International Publication Number: WO 00/57620 (43) International Publication Date: 28 September 2000 (28.09.00) |
| <p>(21) International Application Number: PCT/US00/07566</p> <p>(22) International Filing Date: 22 March 2000 (22.03.00)</p> <p>(30) Priority Data: 60/125,440 22 March 1999 (22.03.99) US</p> <p>(71) Applicant: OCTAVE COMMUNICATIONS, INC. [US/US]; 5 Industrial Way, Salem, NH 03079 (US).</p> <p>(72) Inventors: LEONDIRES, Arthur, P.; 7 Brushwood Drive, Atkinson, NH 03811 (US). O'MALLEY, William; 2 Gloria Road, Georgetown, MA 01833 (US).</p> <p>(74) Agents: O'SHEA, Patrick, J. et al.; Samuels, Gauthier & Stevens LLP, Suite 3300, 225 Franklin Street, Boston, MA 02110 (US).</p> | | <p>(81) Designated States: CA, IL, JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> |

(54) Title: AUDIO CONFERENCING SYSTEM STREAMING SUMMED CONFERENCE SIGNAL ONTO THE INTERNET

(57) Abstract

An audio conferencing system comprises an audio conference mixer (90) that receives digitized audio signals and sums a plurality of the digitized audio signals containing speech to provide a summed conference signal. A transcoder (95) receives and transcodes the summed conference signal to provide a transcoded summed signal that is streamed onto the Internet.

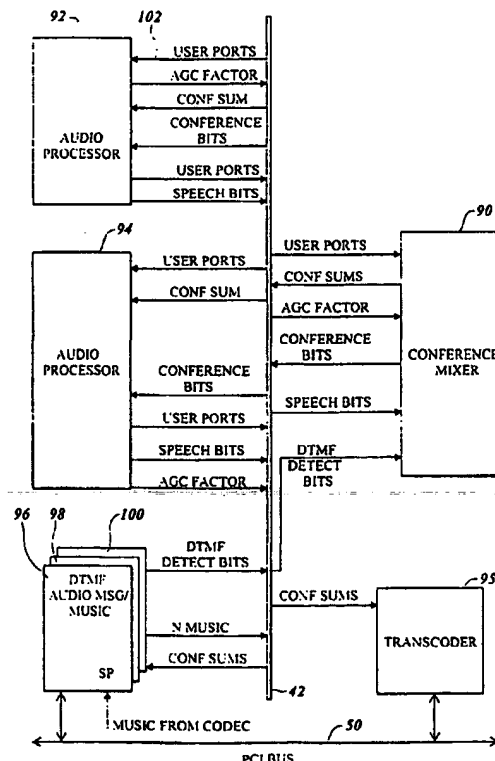

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | KR | Republic of Korea | PT | Portugal | | |
| CN | China | KZ | Kazakhstan | RO | Romania | | |
| CU | Cuba | LC | Saint Lucia | RU | Russian Federation | | |
| CZ | Czech Republic | LI | Liechtenstein | SD | Sudan | | |
| DE | Germany | LK | Sri Lanka | SE | Sweden | | |
| DK | Denmark | LR | Liberia | SG | Singapore | | |
| EE | Estonia | | | | | | |

AUDIO CONFERENCING SYSTEM STREAMING SUMMED CONFERENCE SIGNAL ONTO THE INTERNET

5 CROSS REFERENCE TO RELATED APPLICATIONS

This application contains subject matter related to a commonly assigned co-pending application designated serial number TBD, filed March 22, 2000, entitled *"Scalable Audio Conference Platform "*. This application is hereby incorporated herein by reference.

10

BACKGROUND OF THE INVENTION

The present invention relates to telephony, and in particular to an audio conferencing platform.

Audio conferencing platforms are well known. For example, see U.S. Patents
15 5,483,588 and 5,495,522. Audio conferencing platforms allow conference participants to easily schedule and conduct audio conferences with a large number of users. In addition, audio conference platforms are generally capable of simultaneously supporting many conferences.

Due to the widespread popularity of the World Wide Web, Internet traffic is at
20 an all time high and rapidly increasing. In addition, the move towards IP communications is gathering momentum. Users are currently using the Internet as a mechanism for retrieving streamed audio and video media streams.

There is a need for an audio conferencing system that can stream its summed conference audio onto the Internet in real-time. This will allow a user to listen to an
25 audio conference supported by the audio conferencing system, over the Internet.

SUMMARY OF THE INVENTION

Briefly, according to the present invention, an audio conferencing system comprises an audio conference mixer that receives digitized audio signals and sums a
30 plurality of the digitized audio signals containing speech to provide a summed conference signal. A transcoder receives and transcodes the summed conference signal to provide a transcoded summed signal that is streamed onto the Internet.

In one embodiment an audio conferencing platform includes a data bus, a

controller, and an interface circuit that receives audio signals from a plurality of conference participants and provides digitized audio signals in assigned time slots over the data bus. The audio conferencing platform also includes a plurality of digital signal processors (DSPs) adapted to communicate on the TDM bus with the interface circuit.

5 At least one of the DSPs sums a plurality of the digitized audio signals associated with conference participants who are speaking to provide a summed conference signal. This DSP provides the summed conference signal to at least one of the other plurality of DSPs, which removes the digitized audio signal associated with a speaker whose voice is included in the summed conference signal, thus providing a customized conference

10 audio signal to each of the speakers.

In a preferred embodiment, the audio conferencing platform configures at least one of the DSPs as a centralized audio mixer and at least another one of the DSPs as an audio processor. Significantly, the centralized audio mixer performs the step of summing a plurality of the digitized audio signals associated with conference

15 participants who are speaking, to provide the summed conference signal. The centralized audio mixer provides the summed conference signal to the audio processor(s) for post processing and routing to the conference participants. The post processing includes removing the audio associated with a speaker from the conference signal to be sent to the speaker. For example, if there are forty conference participants

20 and three of the participants are speaking, then the summed conference signal will include the audio from the three speakers. The summed conference signal is made available on the data bus to the thirty-seven non-speaking conference participants. However, the three speakers each receive an audio signal that is equal to the summed conference signal less the digitized audio signal associated with the speaker. Removing

25 the speaker's voice from the audio he hears reduces echoes.

The centralized audio mixer also receives DTMF detect bits indicative of the digitized audio signals that include a DTMF tone. The DTMF detect bits may be provided by another of the DSPs that is programmed to detect DTMF tones. If the digitized audio signal is associated with a speaker, but the digitized audio signal

30 includes a DTMF tone, the centralized conference mixer will not include the digitized audio signal in the summed conference signal while that DTMF detect bit signal is active. This ensures conference participants do not hear annoying DTMF tones in the conference audio. When the DTMF tone is no longer present in the digitized audio

signal, the centralized conference mixer may include the audio signal in the summed conference signal.

The audio conference platform is capable of supporting a number of simultaneous conferences (e.g., 384). As a result, the audio conference mixer provides
5 a summed conference signal for each of the conferences.

Each of the digitized audio signals may be preprocessed. The preprocessing steps include decompressing the signal (e.g., μ -Law or A-Law compression), and determining if the magnitude of the decompressed audio signal is greater than a detection threshold. If it is, then a speech bit associated with the digitized audio signal
10 is set. Otherwise, the speech bit is cleared.

These and other objects, features and advantages of the present invention will become apparent in light of the following detailed description of preferred embodiments thereof, as illustrated in the accompanying drawings.

15 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a pictorial illustration of a conferencing system;

FIG. 2 illustrates a functional block diagram of an audio conferencing platform within the conferencing system of FIG. 1;

FIG. 3 is a block diagram illustration of a processor board within the audio
20 conferencing platform of FIG. 2;

FIG. 4 is a functional block diagram illustration of the resources on the processor board of FIG. 3;

FIG. 5 is a flow chart illustration of audio processor processing for signals received from the network interface cards over the TDM bus;

25 FIG. 6 is a flow chart illustration of the DTMF tone detection processing;

FIGs. 7A-7B together provide a flow chart illustration of the conference mixer processing to create a summed conference signal;

FIG. 8 is a flow chart illustration of audio processor processing for signals to be output to the network interface cards via the TDM bus; and

30 FIG. 9 is a flow chart illustration of the transcoding performed on the summed conference signal(s) to provide "real-time" conference audio over the Internet.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a pictorial illustration of a conferencing system 20. The system 20 connects a plurality of user sites 21-23 through a switching network 24 to an audio conferencing platform 26. The plurality of user sites may be distributed worldwide, or at a company facility/campus. For example, each of the user sites 21-23 may be in 5 different cities and connected to the audio platform 26 via the switching network 24, that may include PSTN and PBX systems. The connections between the user sites and the switching network 24 may include T1, E1, T3 and ISDN lines.

Each user site 21-23 preferably includes a telephone 28 and a computer/server 30. However, a conferences site may only include either the telephone or the 10 computer/server. The computer/server 30 may be connected via an Internet/intranet backbone 32 to a server 34. The audio conferencing platform 26 and the server 34 are connected via a data link 36 (e.g., a 10/100 BaseT Ethernet link). The computer 30 allows the user to participate in a data conference simultaneous to the audio conference via the server 34. In addition, the user can use the computer 30 to interface (e.g., via 15 a browser) with the server 34 to perform functions such as conference control, administration (e.g., system configuration, billing, reports,...), scheduling and account maintenance. The telephone 28 and the computer 30 may cooperate to provide voice over the Internet/intranet 32 to the audio conferencing platform 26 via the data link 36.

FIG. 2 illustrates a functional block diagram of the audio conferencing platform 20 26. The audio conferencing platform 26 includes a plurality of network interface cards (NICs) 38-40 that receive audio information from the switching network 24 (FIG. 1). Each NIC may be capable of handling a plurality of different trunk lines (e.g., eight). The data received by the NIC is generally an 8-bit μ -Law or A-Law sample. The NIC places the sample into a memory device (not shown), which is used to output the audio 25 data onto a data bus. The data bus is preferably a time division multiplex (TDM) bus, for example based upon the H.110 telephony standard.

The audio conferencing platform 26 also includes a plurality of processor boards 44-46 that receive and transmit data to the NICs 38-40 over the TDM bus 42. The NICs and the processor boards 44-46 also communicate with a controller/CPU 30 board 48 over a system bus 50. The system bus 50 is preferably based upon the compact PCi standard. The CPU/controller communicates with the server 34 (FIG. 1) via the data link 36. The controller/CPU board may include a general purpose processor such as a 200 MHz Pentium™ CPU manufactured by Intel Corporation, a

processor from AMD or any other similar processor (including an ASIC) having sufficient MIPS to support the present invention.

FIG. 3 is block diagram illustration of the processor board 44 of the audio conferencing platform. The board 44 includes a plurality of dynamically programmable digital signal processors 60-65. Each digital signal processor (DSP) is an integrated circuit that communicates with the controller/CPU card 48 (FIG. 2) over the system bus 50. Specifically, the processor board 44 includes a bus interface 68 that interconnects the DSPs 60-65 to the system bus 50. Each DSP also includes an associated dual port RAM (DPR) 70-75 that buffers commands and data for transmission between the system bus 50 and the associated DSP.

Each DSP 60-65 also transmits data over and receives data from the TDM bus 42. The processor card 44 includes a TDM bus interface 78 that performs any necessary signal conditioning and transformation. For example, if the TDM bus is a H.110 bus then it includes thirty-two serial lines, as a result the TDM bus interface may include a serial-to-parallel and a parallel-to-serial interface. An example, of a serial-to-parallel and a parallel-to-serial interface is disclosed in commonly assigned United States Provisional Patent Application designated serial number 60/105,369 filed October 23, 1998 and entitled "Serial-to-Parallel/Parallel-to-Serial Conversion Engine". This application is hereby incorporated by reference.

Each DSP 60-65 also includes an associated TDM dual port RAM 80-85 that buffers data for transmission between the TDM bus 42 and the associated DSP.

Each of the DSPs is preferably a general purpose digital signal processor IC, such as the model number TMS320C6201 processor available from Texas Instruments. The number of DSPs resident on the processor board 44 is a function of the size of the integrated circuits, their power consumption and the heat dissipation ability of the processor board. For example, there may be between four and ten DSPs per processor board.

Executable software applications may be downloaded from the controller/CPU 48 (FIG. 2) via the system bus 50 to a selected one(s) of the DSPs 60-65. Each of the DSPs is also connected to an adjacent DSP via a serial data link.

FIG. 4 is a functional illustration of the DSP resources on the processor board 44 illustrated in FIG. 3. Referring to FIGs. 3 and 4, the controller/CPU 48 (FIG. 2) downloads executable program instructions to a DSP based upon the function that the

controller/CPU assigns to the DSP. For example, the controller/CPU may download executable program instructions for the DSP₃ 62 to function as an audio conference mixer 90, while the DSP₂ 61 and the DSP₄ 63 may be configured as audio processors 92, 94, respectively. DSP₅ 64 may be configured to perform transcoding 95 on the conference sums in order to provide an audio conference signal suitable for transmission over the Internet in real-time. This feature will be discussed in detail hereinafter. Significantly, this allows users to listen to the audio conference via the Internet (i.e., using packet switched audio). Other DSPs 60, 65 may be configured by the controller/CPU 48 (FIG. 2) to provide services such as DTMF detection 96, audio message generation 98 and music play back 100.

Each audio processor 92, 94 is capable of supporting a certain number of user ports (i.e., conference participants). This number is based upon the operational speed of the various components within the processor board, and the over-all design of the system. Each audio processor 92, 94 receives compressed audio data 102 from the conference participants over the TDM bus 42.

The TDM bus 42 may support 4096 time slots, each having a bandwidth of 64 kbps. The timeslots are generally dynamically assigned by the controller/CPU 48 (FIG. 2) as needed for the conferences that are currently occurring. However, one of ordinary skill in the art will recognize that in a static system the timeslots may be nailed up.

FIG. 5 is a flow chart illustration of processing steps 500 performed by each audio processor on the digitized audio signals received over the TDM bus 42 from the NICs 38-40 (FIG. 2). The executable program instructions associated with these processing steps 500 are typically downloaded to the audio processors 92, 94 (FIG. 4) by the controller/CPU 48 (FIG. 2). The download may occur during system initialization or reconfiguration. These processing steps 500 are executed at least once every 125 μ seconds to provide audio of the requisite quality.

For each of the active/assigned ports for the audio processor, step 502 reads the audio data for that port from the TDM dual port RAM associated with the audio processor. For example, if DSP₂ 61 (FIG. 3) is configured to perform the function of audio processors 92 (FIG. 4), then the data is read from the read bank of the TDM dual port RAM 81. If the audio processor 92 is responsible for 700 active/assigned

ports, then step 502 reads the 700 bytes of associated audio data from the TDM dual port RAM 81. Each audio processor includes a time slot allocation table (not shown) that specifies the address location in the TDM dual port RAM for the audio data from each port.

- 5 Since each of the audio signals is compressed (e.g., μ -Law, A-Law, etc), step 604 decompresses each of the 8-bit signals to a 16-bit word. Step 506 computes the average magnitude (AVM) for each of the decompressed signals associated with the ports assigned to the audio processor.

Step 508 is performed next to determine which of the ports are speaking. This
10 step compares the average magnitude for the port computed in step 506 against a predetermined magnitude value representative of speech (e.g., -35 dBm). If average magnitude for the port exceeds the predetermined magnitude value representative of speech, a speech bit associated with the port is set. Otherwise, the associated speech bit is cleared. Each port has an associated speech bit. Step 510 outputs all the speech
15 bits (eight per timeslot) onto the TDM bus. Step 512 is performed to calculate an automatic gain correction (AGC) factor for each port. To compute an AGC value for the port, the AVM value is converted to an index value associated with a table containing gain/attenuation factors. For example, there may be 256 index values, each uniquely associated with 256 gain/attenuation factors. The index value is used by the
20 conference mixer 90 (FIG. 4) to determine the gain/attenuation factor to be applied to an audio signal that will be summed to create the conference sum signal.

FIG. 6 is a flow chart illustration of the DTMF tone detection processing 600. These processing steps 600 are performed by the DTMF processor 96 (FIG. 4), preferably at least once every 125 μ seconds, to detect DTMF tones within on the
25 digitized audio signals from the NICs 38-40 (FIG. 2). One or more of the DSPs may be configured to operate as a DTMF tone detector. The executable program instructions associated with the processing steps 600 are typically downloaded by the controller/CPU 48 (FIG. 2) to the DSP designated to perform the DTMF tone detection function. The download may occur during initialization or system reconfiguration.

- 30 For an assigned number of the active/assigned ports of the conferencing system, step 602 reads the audio data for the port from the TDM dual port RAM associated with the DSP(s) configured to perform the DTMF tone detection function. Step 604 then expands the 8-bit signal to a 16-bit word. Next, step 606 tests each of these

decompressed audio signals to determine if any of the signals includes a DTMF tone. For any signal that does include a DTMF tone, step 606 sets a DTMF detect bit associated with the port. Otherwise, the DTMF detect bit is cleared. Each port has an associated DTMF detect bit. Step 608 informs the controller/CPU 48 (FIG. 3) which
5 DTMF tone was detected, since the tone is representative of system commands and/or data from a conference participant. Step 610 outputs the DTMF detect bits onto the TDM bus.

FIGs. 7A-7B collectively provide a flow chart illustration of processing steps 700 performed by the audio conference mixer 90 (FIG. 4) at least once every 125
10 μ seconds to create a summed conference signal for each conference. The executable program instructions associated with the processing steps 700 are typically downloaded by the controller/CPU 48 (FIG. 2) over the system bus 50 (FIG. 2) to the DSP designated to perform the conference mixer function. The download may occur during initialization or system reconfiguration.

15 Referring to FIG. 7A, for each of the active/assigned ports of the audio conferencing system, step 702 reads the speech bit and the DTMF detect bit received over the TDM bus 42 (FIG. 4). Alternatively, the speech bits may be provided over a dedicated serial link that interconnects the audio processor and the conference mixer. Step 704 is then performed to determine if the speech bit for the port is set (i.e., was
20 energy detected on that port?). If the speech bit is set, then step 706 is performed to see if the DTMF detect bit for the port is also set. If the DTMF detect bit is clear, then the audio received by the port is speech and the audio does not include DTMF tones. As a result, step 708 sets the conference bit for that port, otherwise step 709 clears the conference bit associated with the port. Since the audio conferencing
25 platform 26 (FIG. 1) can support many simultaneous conferences (e.g., 384), the controller/CPU 48 (FIG. 2) keeps track of the conference that each port is assigned to and provides that information to the DSP performing the audio conference mixer function. Upon the completion of step 708, the conference bit for each port has been updated to indicate the conference participants whose voice should be included in the
30 conference sum.

Referring to FIG. 7B, for each of the conferences, step 710 is performed to decompress each of the audio signals associated with conference bits that are set. Step 711 performs AGC and gain/TLP compensation on the expanded signals from step

710. Step 712 is then performed to sum each of the compensated audio samples to provide a summed conference signal. Since many conference participants may be speaking at the same time, the system preferably limits the number of conference participants whose voice is summed to create the conference audio. For example, the
5 system may sum the audio signals from a maximum of three speaking conference participants. Step 714 outputs the summed audio signal for the conference to the audio processors. In a preferred embodiment, the summed audio signal for each conference is output to the audio processor(s) over the TDM bus. Since the audio conferencing platform supports a number of simultaneous conferences, steps 710-714 are performed
10 for each of the conferences.

FIG. 8 is a flow chart illustration of processing steps 800 performed by each audio processor to output audio signals over the TDM bus to conference participants. The executable program instructions associated with these processing steps 800 are typically downloaded to each audio processor by the controller/CPU during system
15 initialization or reconfiguration. These steps 800 are also preferably executed at least once every 125 μ seconds.

For each active/assigned port, step 802 retrieves the summed conference signal for the conference that the port is assigned to. Step 804 reads the conference bit associated with the port, and step 806 tests the bit to determine if audio from the port
20 was used to create the summed conference signal. If it was, then step 808 removes the gain (e.g., AGC and gain/TLP) compensated audio signal associated with the port from the summed audio signal. This step removes the speaker's own voice from the conference audio. If step 806 determines that audio from the port was not used to create the summed conference signal, then step 808 is bypassed. To prepare the signal
25 to be output, step 810 applies a gain, and step 812 compresses the gain corrected signal. Step 814 then outputs the compressed signal onto the TDM bus for routing to the conference participant associated with the port, via the NIC (FIG. 2).

Notably, the audio conferencing platform 26 (FIG. 1) computes conference sums at a central location. This reduces the distributed summing that would otherwise
30 have to be performed to ensure that the ports receive the proper conference audio. In addition, the conference platform is readily expandable by adding additional NICs and/or processor boards. That is, the centralized conference mixer architecture allows the audio conferencing platform to be scaled to the user's requirements.

FIG. 9 is a flow chart illustration of processing steps 900 performed by the transcoder 95 (also referred to as an encoder). The executable program instructions associated with these processing steps 900 are typically downloaded to the transcoding circuit by the controller/CPU during system initialization or reconfiguration. These 5 steps 900 are also preferably executed at least once every 125 μ seconds.

For each conference that the system is supporting - the transcoder 95 (FIG. 4) executes step 902 to read the conference sum associated with the conference. Step 904 is then performed to transcode the conference sum signal into a format that is suitable for transmission over the Internet. For example, step 904 may involve transcoding the 10 conference sum from μ -LAW format to a format that is suitable for streaming the audio conference onto the Internet in real-time. Step 906 is then performed to output the transcoded sum onto the system bus 50. Referring again to FIG. 2, the transcoded sum is output on the system bus 50 to the controller/CPU 48, which outputs the transcoded sum on the data link 36 to the server 34 (FIG. 1). The server then streams the 15 transcoded sum to conference participants via the Internet/intranet.

The transcoding may be performed using the REALPLAYER™ streamer available from Real Networks. In general, the transcoder 95 (FIG. 4) performs the task of streaming audio conferences onto the Internet (and intranets) in real-time. One of ordinary skill in the art will recognize that transcoding/encoding techniques other 20 than those provided by the REALPLAYER™ real-time streamer may also be used. In addition, the present invention is clearly not limited to the preferred embodiment illustrated herein. It is contemplated that the method of streaming a real-time audio conference to conference participants via the Internet may be performed a number of different ways. For example, rather than having the server physically separate from 25 the audio conference platform, the server function may be integrated into the audio conference platform. In addition, the server may also receive requests/data over the Internet/intranet such as a question from a participant, which can be routed to the other conference participants either by the server in the form of text over the Internet/intranet, a synthesized voice or the actual voice.

30 One of ordinary skill will appreciate that as processor speeds continue to increase, that the overall system design is a function of the processing ability of each DSP. For example, if a sufficiently fast DSP was available, then the functions of the audio conference mixer, the audio processor and the DTMF tone detection and the

other DSP functions may be performed by a single DSP.

Although the present invention has been shown and described with respect to several preferred embodiments thereof, various changes, omissions and additions to the form and detail thereof, may be made therein, without departing from the spirit and
5 scope of the invention.

What is claimed is:

CLAIMS

1 1. An audio conferencing system, comprising:
2 an audio conference mixer that receives digitized audio signals and sums a
3 plurality of said digitized audio signals containing speech to provide a summed
4 conference signal; and
5 a transcoder that receives and transcodes said summed conference signal to
6 provide a transcoded summed signal that is streamed onto the Internet.

1 2. An audio conferencing system, comprising:
2 a data bus;
3 a plurality of digital signal processors adapted to communicate on said data bus,
4 wherein a first of said plurality of digital signal processors receives digitized audio
5 signals associated with conference participants who are speaking, and sums a plurality
6 of said digitized audio signals to provide to a second of said plurality of digital signal
7 processors a summed conference signal and a conference list indicative of said digitized
8 audio signals summed to generate said summed conference signal, wherein for each
9 conference participant on said conference list said second of said plurality of digital
10 signal processors removes said digitized audio signal associated with the conference
11 participant from said summed conference signal to provide a unique conference signal
12 for the conference participant; and
13 means for receiving and transcoding said summed conference signal to provide
14 a transcoded summed signal that is streamed onto the Internet.

1 3. The audio conferencing system of claim 2, wherein said means for receiving
2 and transcoding comprises a digital signal processor adapted to receive said summed
3 conference signal and process said summed conference signal to provide a transcoded
4 summed signal that is streamed on the Internet.

1 4. The audio conferencing system of claim 2, wherein said first of said plurality of
2 digital signal processors is configured as an audio conference mixer, said second of
3 said plurality of digital signal processors is configured as an audio processor that
4 receives said digitized audio signals and determines which of said digitized audio
5 signals comprises voice data and provides a speech list indicative thereof to said audio

6 conference mixer, which sums a plurality of said digitized audio signals identified in
7 said speech list to provide said summed conference signal.

1 5. The audio conferencing system of claim 4, wherein said speech list comprises a
2 plurality of speech bits, each uniquely associated with one of said digitized audio
3 signals.

1 6. The audio conferencing system of claim 5, wherein said conference list
2 comprises a plurality of conference bits, each uniquely associated with one of said
3 digitized audio signals.

1 7. The audio conferencing system of claim 2, further comprising:
2 a system bus; and
3 a controller that communicates with said plurality of digital signal processors
4 over said system bus, and downloads executable program instructions to said digital
5 signal processors.

1 8. The audio conferencing system of claim 4 wherein said audio processor
2 provides said plurality of digitized audio signals to said audio conference mixer over a
3 dedicated communications link between said audio processor and said audio conference
4 mixer.

1 9. The audio conferencing system of claim 4 wherein said audio processor
2 provides said
3 plurality of digitized audio signals to said audio conference mixer over said data bus.

1 10. An audio conferencing platform, comprising:
2 means for receiving audio signals associated with conference participants, and
3 for providing a digitized audio signal and a speech bit for each of said audio signals,
4 wherein said speech bit indicates whether or not said associated digitized audio signal
5 includes voice data from the associated conference participant;
6 an audio conference mixer adapted to receive said digitized audio signals and
7 said speech bits, and sum a plurality of said digitized audio signals based upon the state
8 of said speech bits to provide a summed conference signal, and provide a conference

9 list indicative of the conference participants whose voice is included in said summed
10 conference signal;

11 means for receiving said summed conference signal and said conference list, for
12 providing said summed conference signal to each of said conference participants that
13 are not on said conference list, and for each conference participant on the conference
14 list removing the digitized audio signal associated with that conference participant from
15 said summed conference signal and providing a resultant difference audio signal to the
16 conference participant on said conference list; and

17 circuitry adapted to transcode said summed conference signal to provide a
18 transcoded summed signal that is streamed onto the Internet.

1 11. The audio conferencing platform of claim 10, wherein said audio conference
2 mixer comprises a first digital signal processor.

1 12. The audio conferencing platform of claim 11, wherein said means for receiving
2 audio signals comprises a network interface circuit and a second digital signal
3 processor configured to operate as an audio processor, wherein said network interface
4 circuit and said audio processor are interconnected by a time division multiplex (TDM)
5 bus.

1 13. The audio conferencing platform of claim 10, wherein said means for receiving
2 said summed conference signal and said conference list comprises a digital signal
3 processor.

1 14. The audio conferencing platform of claim 10, further comprising a time division
2 multiplex (TDM) bus that interconnects (i) said means for receiving audio signals
3 associated with conference participants, (ii) said audio conference mixer and (iii) said
4 means for receiving said summed conference signal and said conference list, wherein
5 said summed conference signal and said conference list are provided over said TDM
6 bus.

1 15. The audio conferencing platform of claim 10, wherein said audio conferencing
2 platform supports a plurality of simultaneous conferences and said means for receiving
3 audio signals further comprises,

4 means for DTMF tone detection that tests each of said audio signals to
5 determine if a DTMF tone is present and provides a DTMF detect bit indicative
6 thereof, wherein each of said audio signals has a uniquely associated DTMF detect bit;
7 and

8 said audio conference mixer comprises means for checking said DTMF detect
9 bit associated with any digitized audio signal to be added to said summed conference
10 signal based upon said speech list, to ensure that said summed conference signal does
11 not include digitized audio signals whose associated DTMF detect bit indicates the
12 presence of a DTMF tone.

1 16. An audio conferencing platform that provides a summed conference signal over
2 the Internet, said platform comprising:

3 input circuitry adapted to received audio signals associated with conference
4 participants, and provide a digitized audio signal and a speech bit for each of said audio
5 signals, wherein said speech bit indicates whether or not said associated digitized audio
6 signal includes voice data from the associated conference participant;

7 a centralized audio conference mixer adapted to receive said digitized audio
8 signals and said speech bits, and sum a plurality of said digitized audio signals based
9 upon the state of said speech bits to provide a summed conference signal, and provide a
10 conference list indicative of the conference participants whose voice is included in said
11 summed conference signal;

12 an encoder that receives and transcodes said summed conference signal to
13 provide a transcoded summed signal that is streamed onto the Internet.

1/10


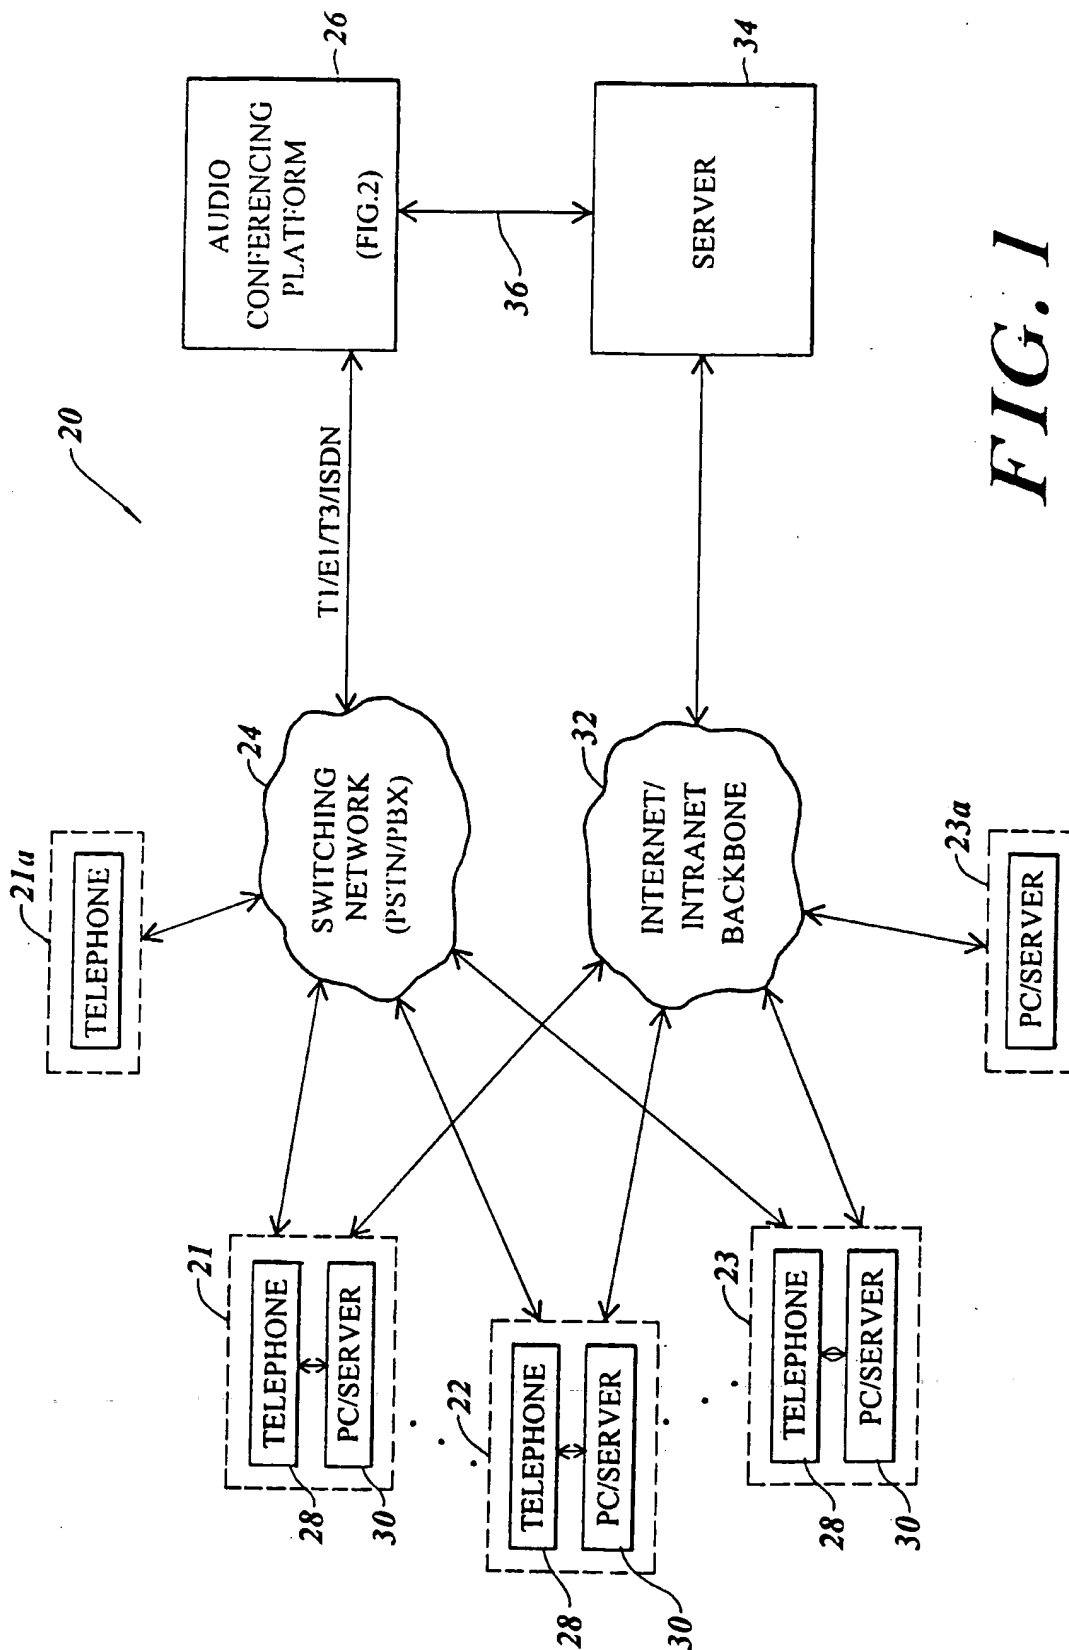


FIG. 1

2/10

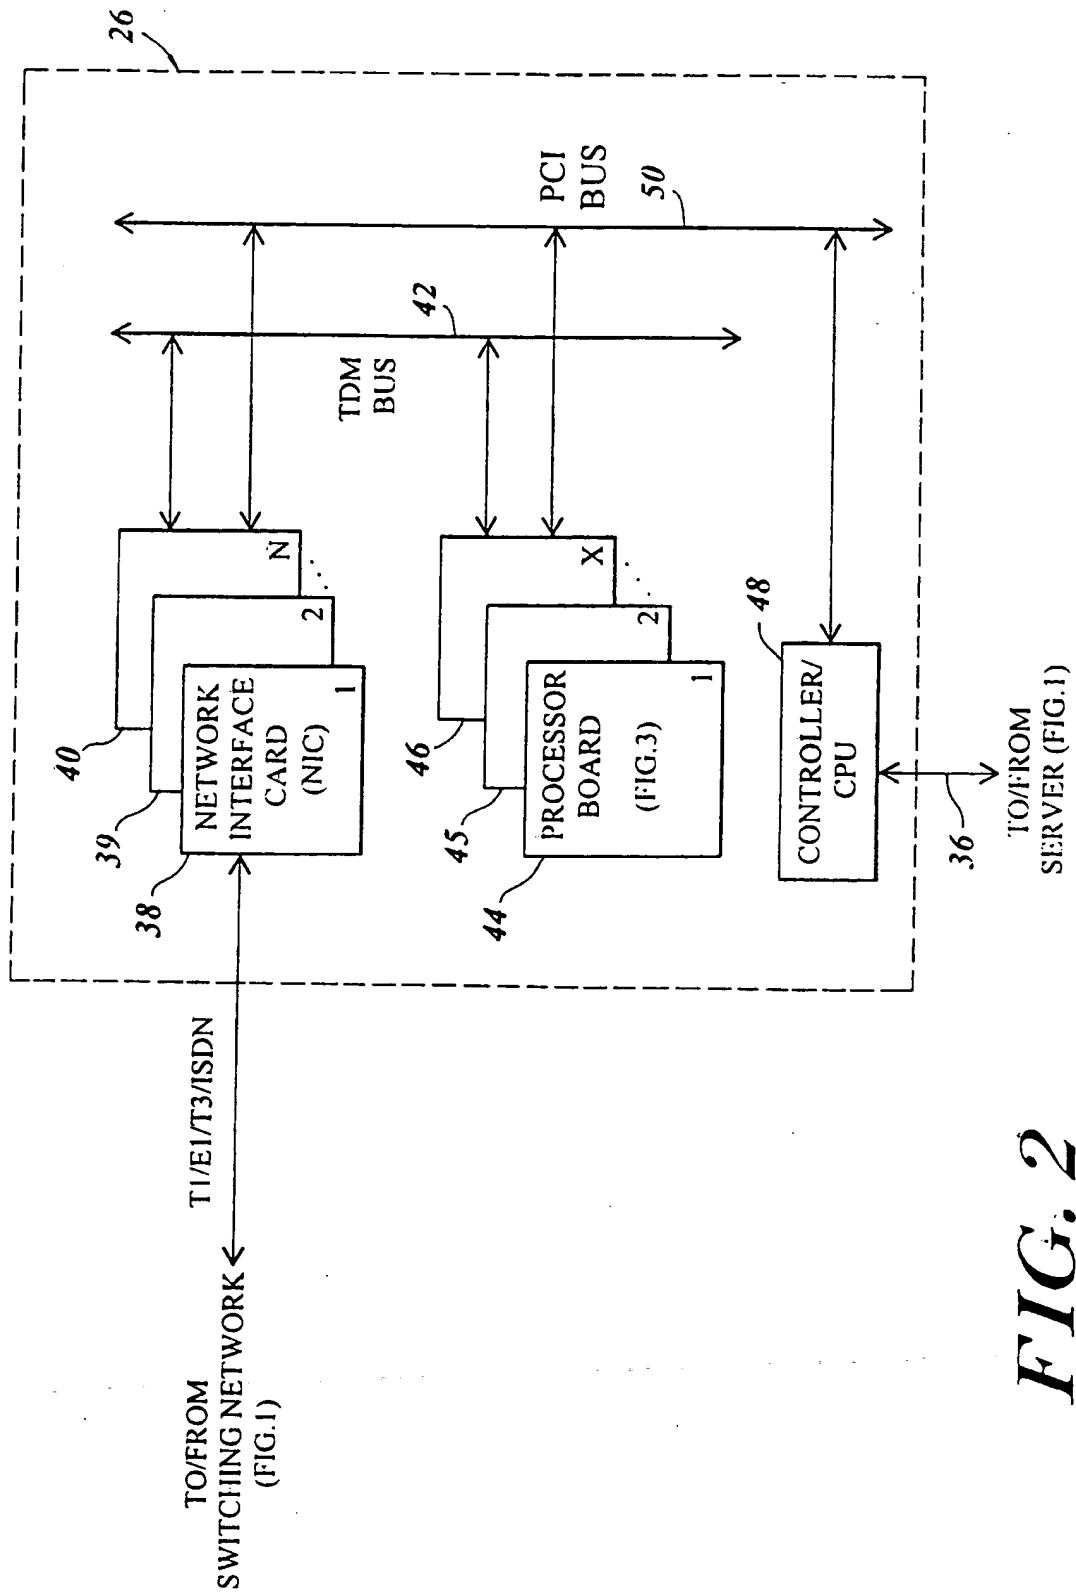

3/10

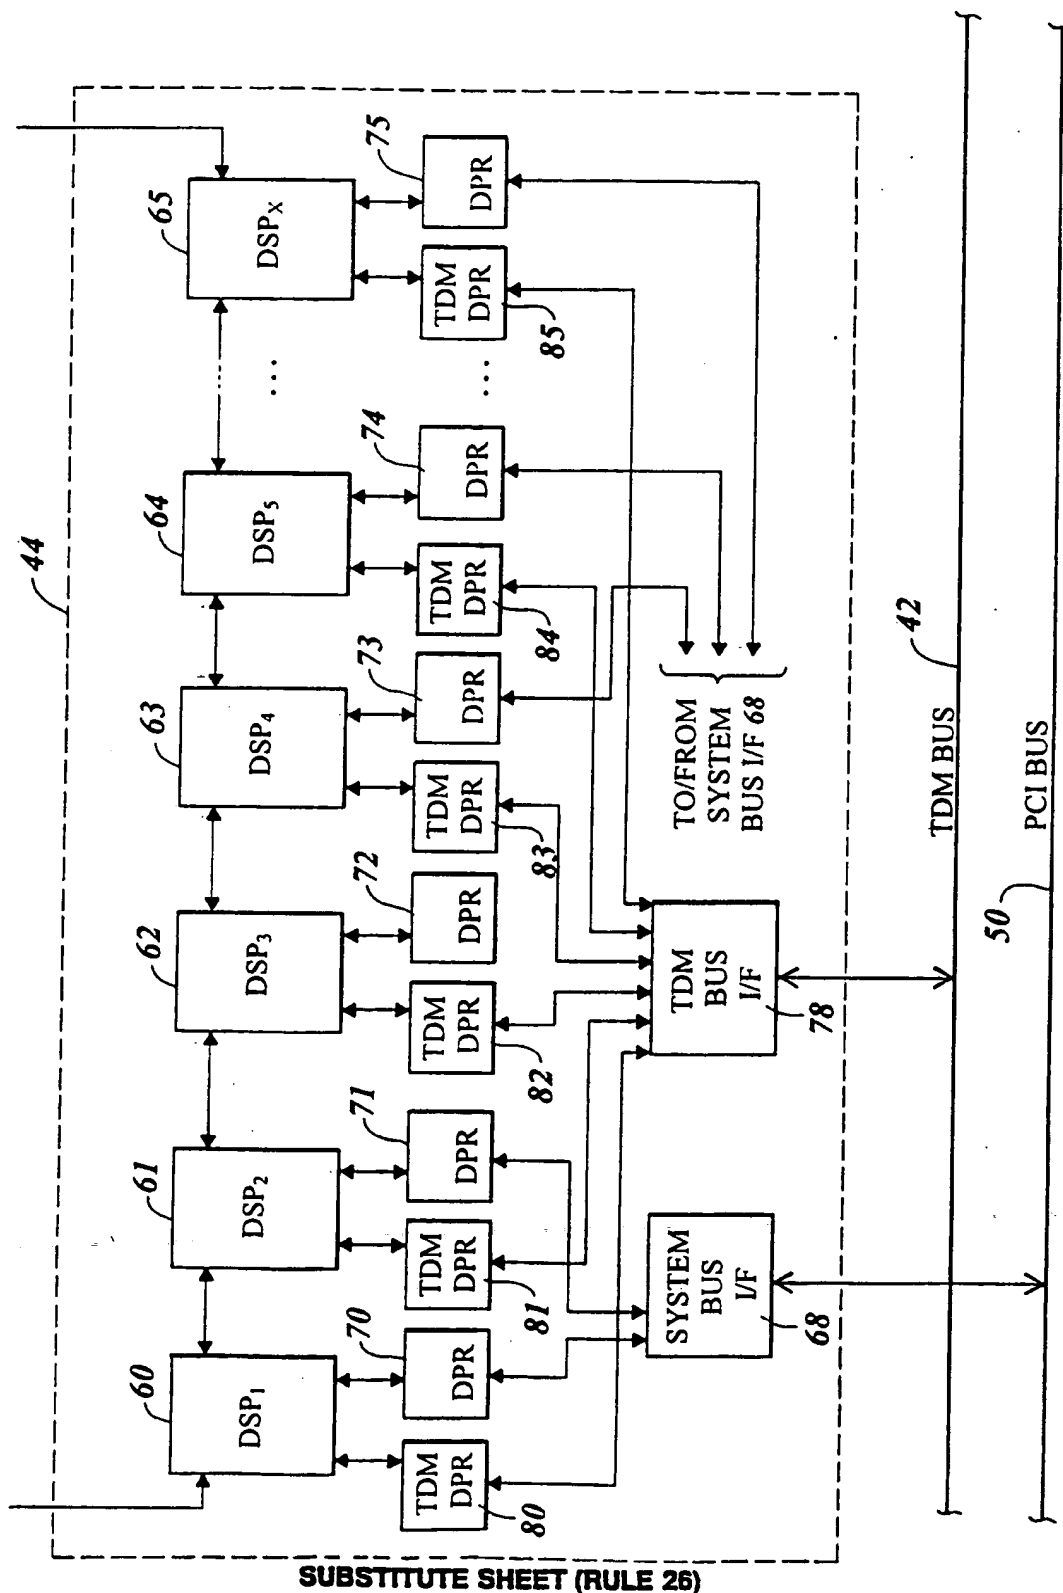


FIG. 3

4/10

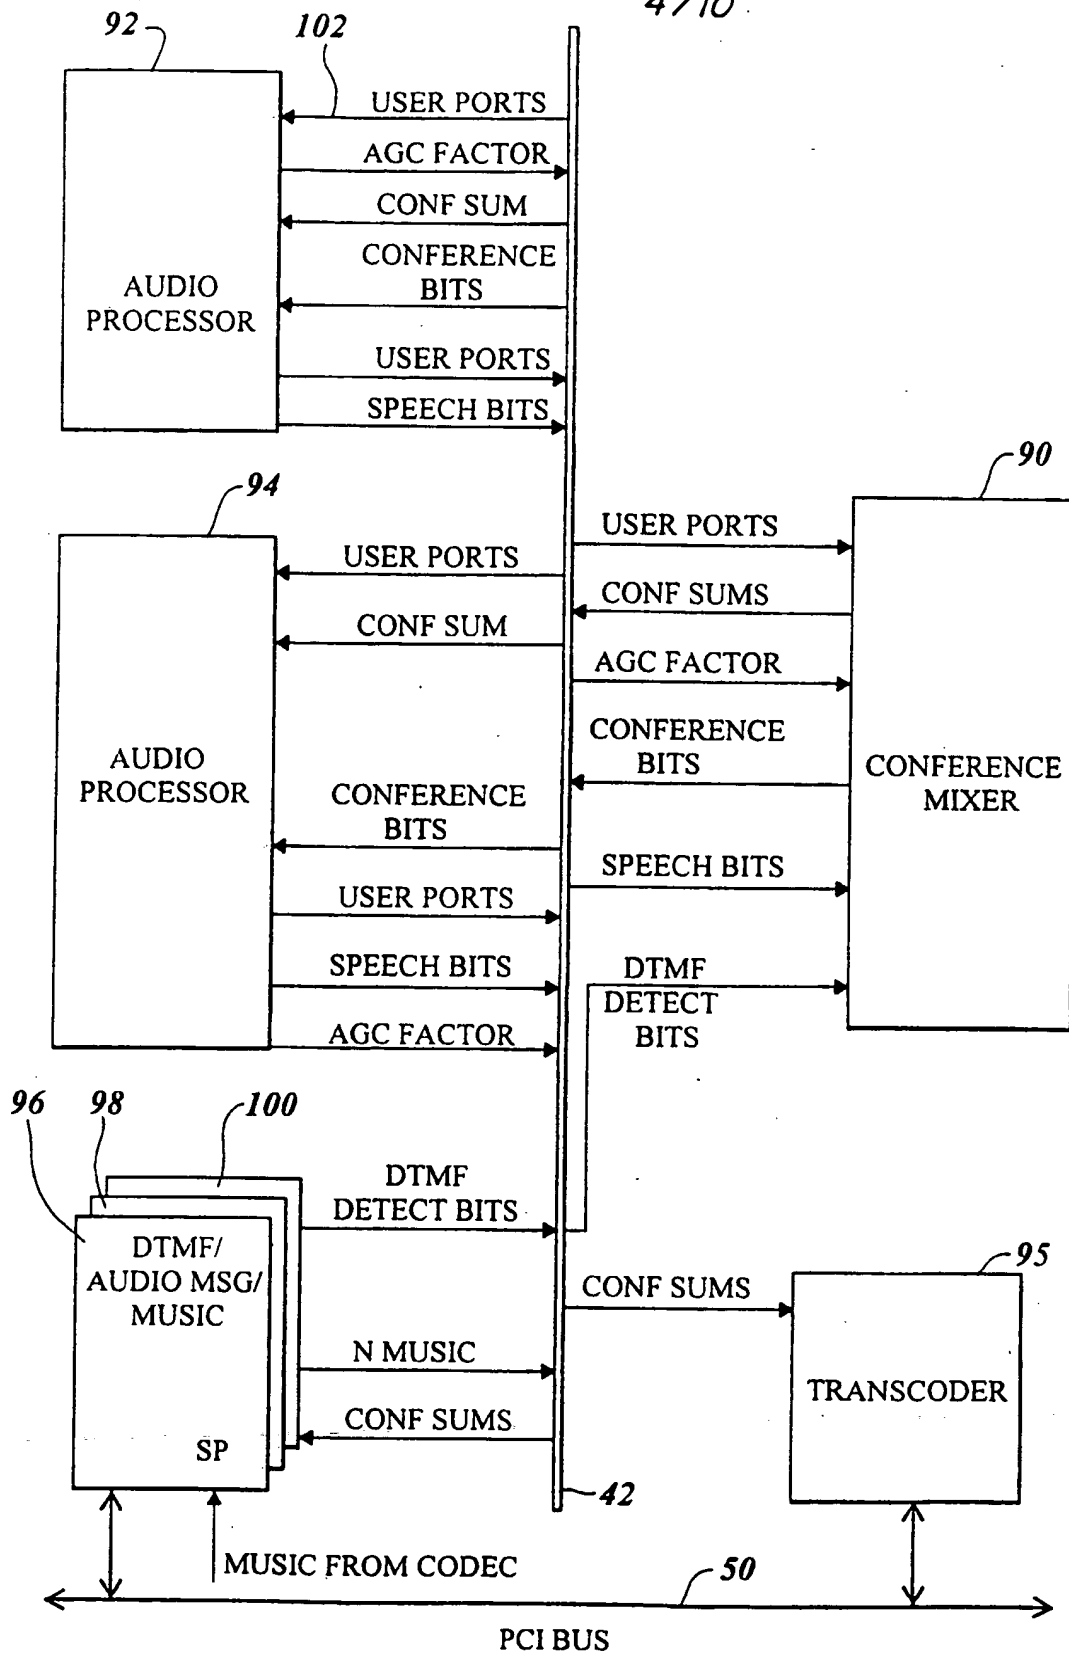
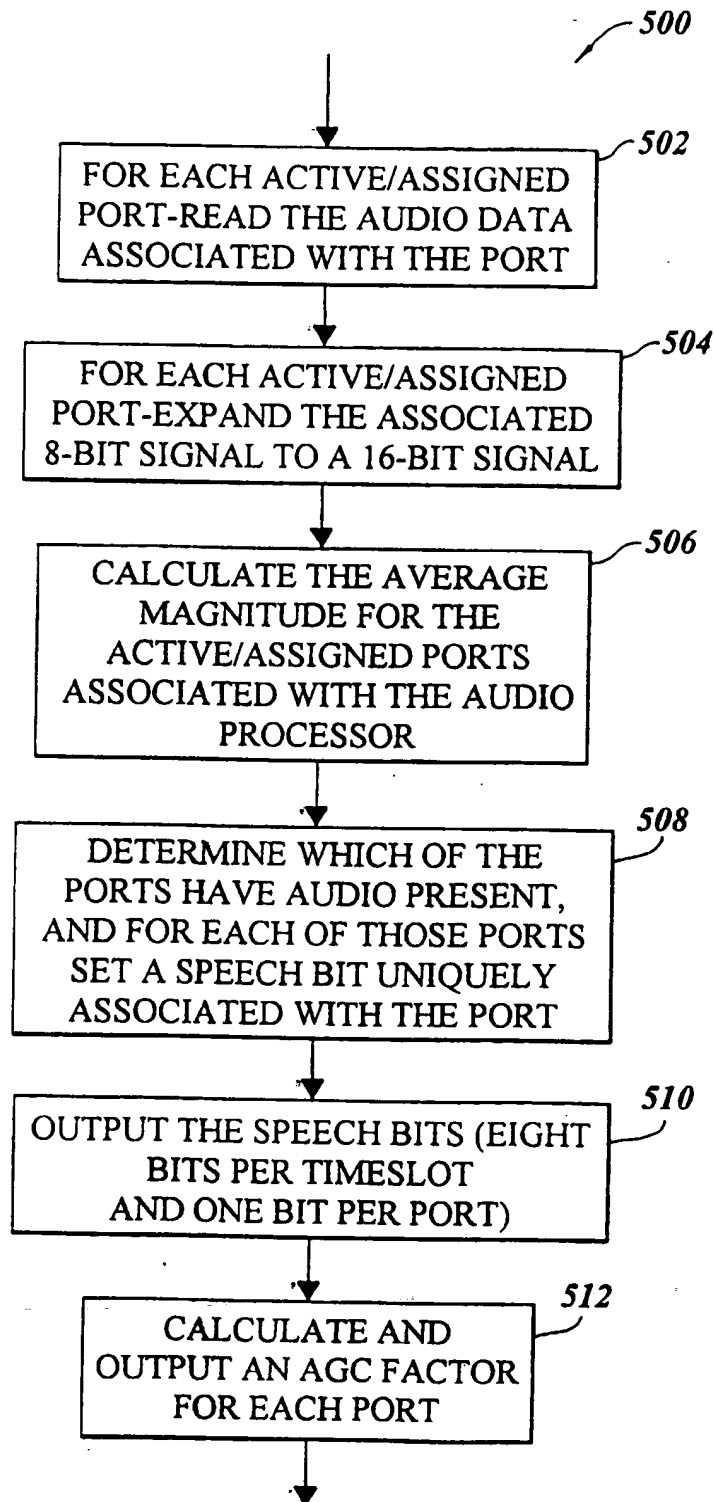
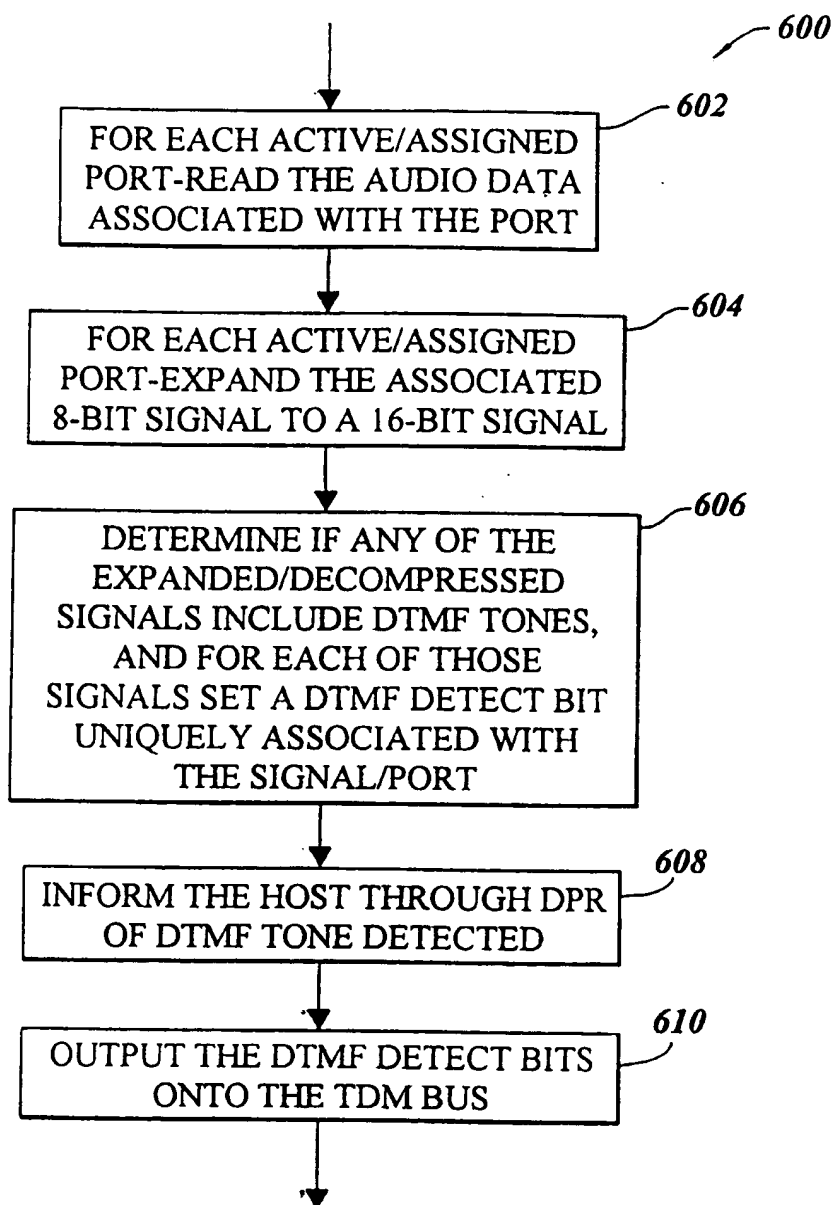


FIG. 4

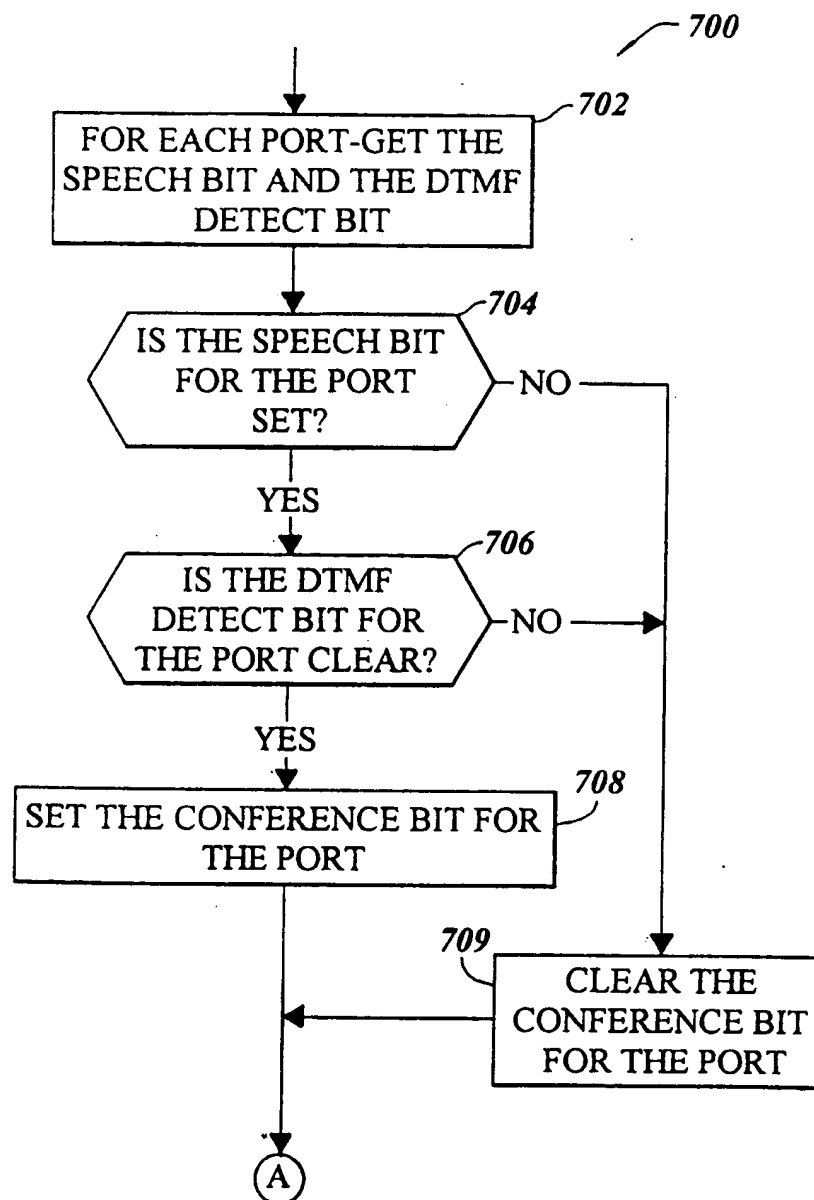
5 / 10

*FIG. 5*

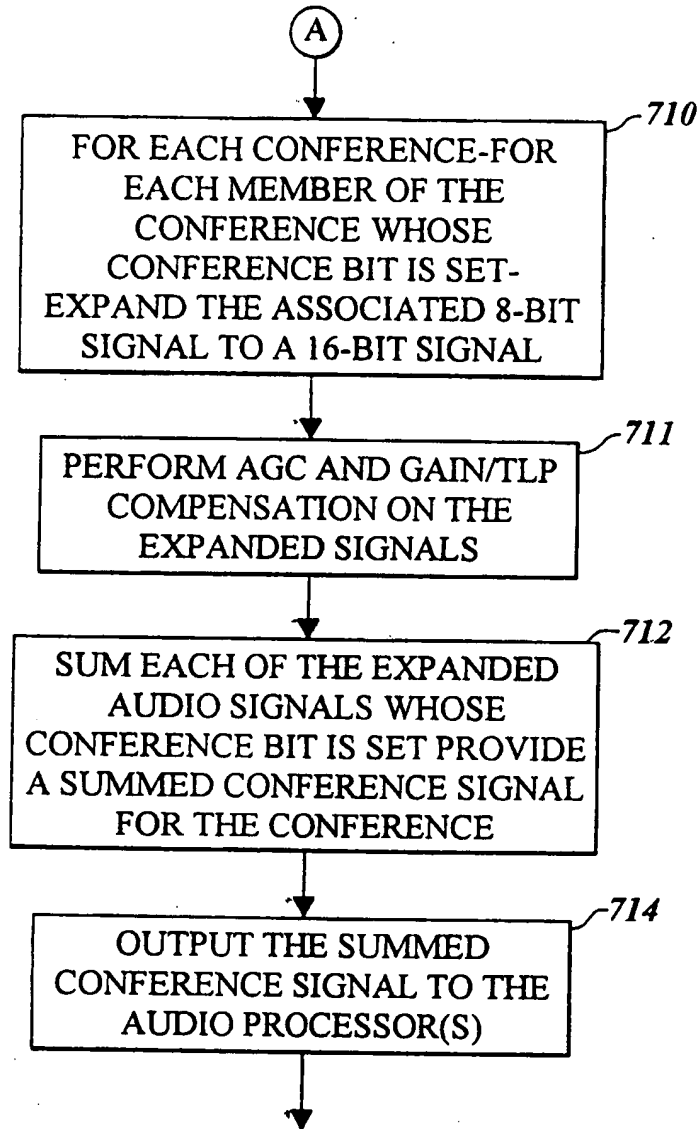
6/10

*FIG. 6*

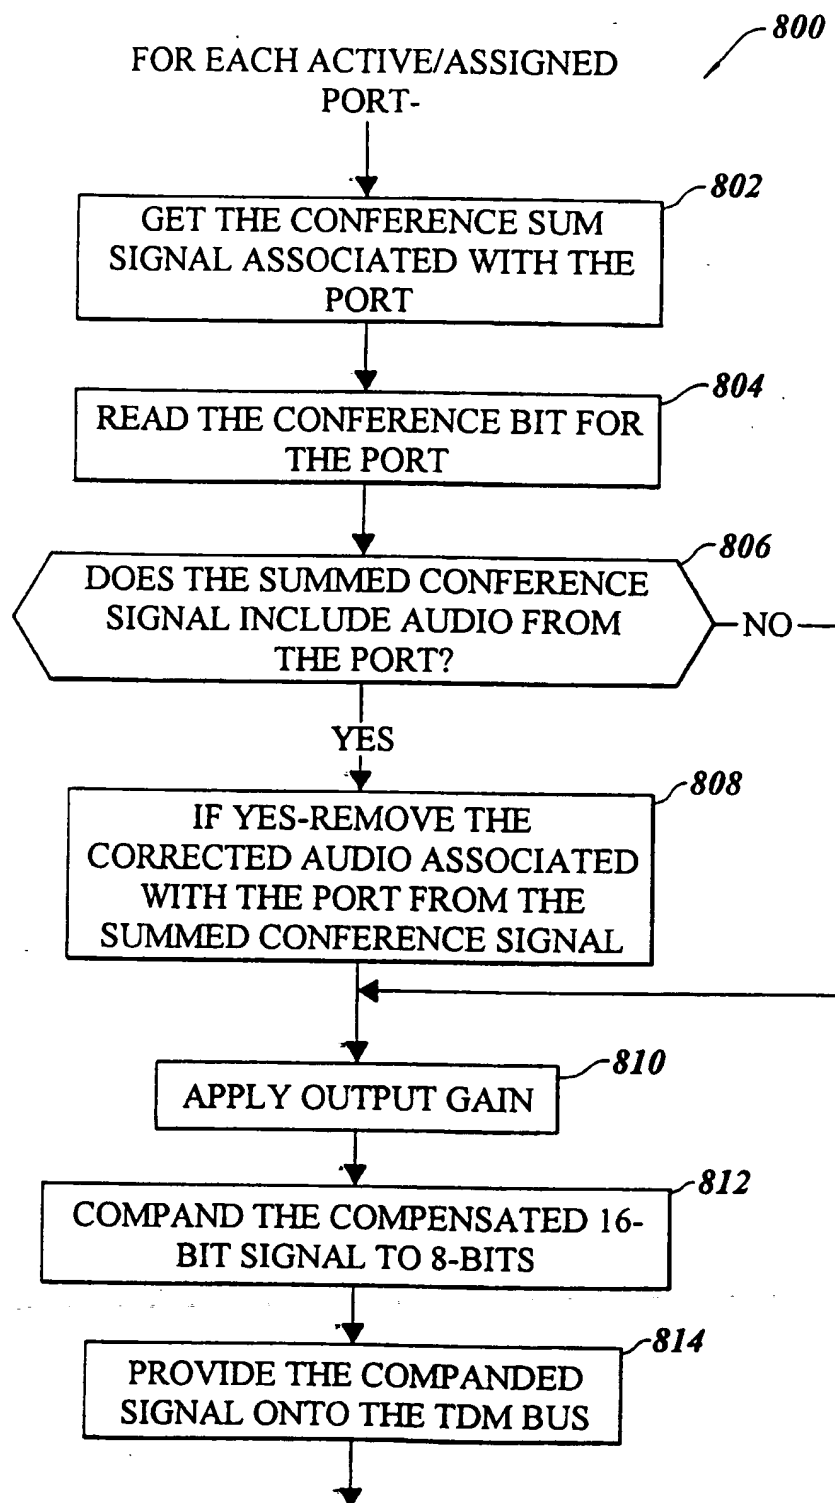
7/10

**FIG. 7A**

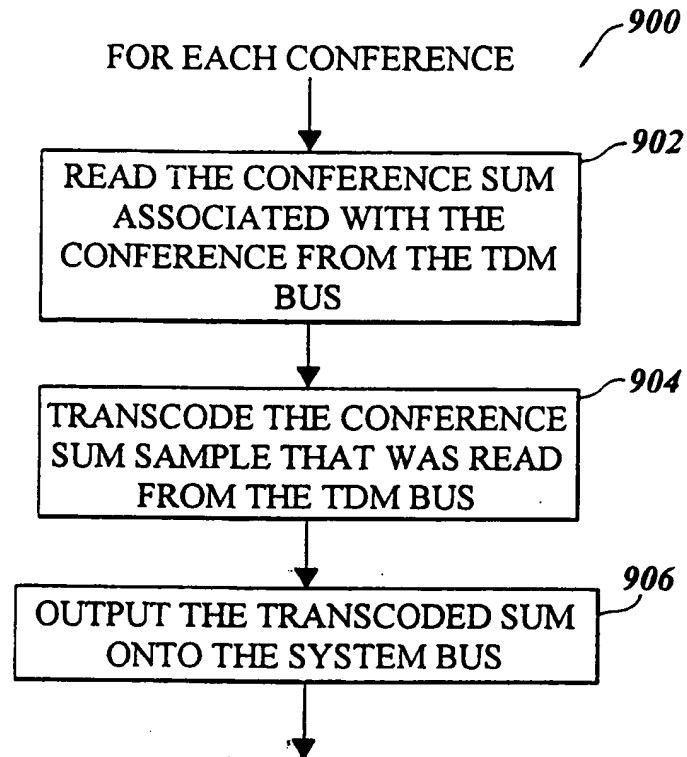
8/10

*FIG. 7B*

9/10

**FIG. 8**

10/10

*FIG. 9*

INTERNATIONAL SEARCH REPORT

Int. onal Application No

PCT/US 00/07566

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04M3/56 H04M7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

INSPEC, EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| Y | SHADDOCK, ROBERT: "DSPs or microprocessors - which device to use?" COMPUTER DESIGN., August 1998 (1998-08), pages 54-61, XP000850043 PENNWELL PUBL. LITTLETON, MASSACHUSETTS., US ISSN: 0010-4566 page 56; figure | 1 |
| Y | ----- | 2-16 |
| Y | US 5 495 522 A (GARRISON MARSHALL B ET AL) 27 February 1996 (1996-02-27) column 2, line 10-59 | 1 |
| Y | column 44, paragraph 15 ----- -/-- | 2-16 |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 July 2000

Date of mailing of the international search report

28/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo rd,
Fax: (+31-70) 340-3018

Authorized officer

Cremer, J

INTERNATIONAL SEARCH REPORT

Inte. onal Application No

PCT/US 00/07566

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| Y | <p>LIU J -M ET AL: "A DIGITAL MULTIPOINT TELECOMMUNICATION CONFERENCE VLSI" PROCEEDINGS OF THE CUSTOM INTEGRATED CIRCUITS CONFERENCE,US,NEW YORK, IEEE, vol. CONF. 7, May 1985 (1985-05), pages 88-91, XP000811672</p> <p>page 88, right-hand column -page 89, left-hand column</p> <p>-----</p> | 2-16 |

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 00/07566

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| US 5495522 A | 27-02-1996 | AU 672289 B | 26-09-1996 |
| | | AU 6131594 A | 29-08-1994 |
| | | CA 2154464 A | 18-08-1994 |
| | | EP 0681772 A | 15-11-1995 |
| | | JP 8506460 T | 09-07-1996 |
| | | WO 9418779 A | 18-08-1994 |
| <hr/> | | | |

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.